
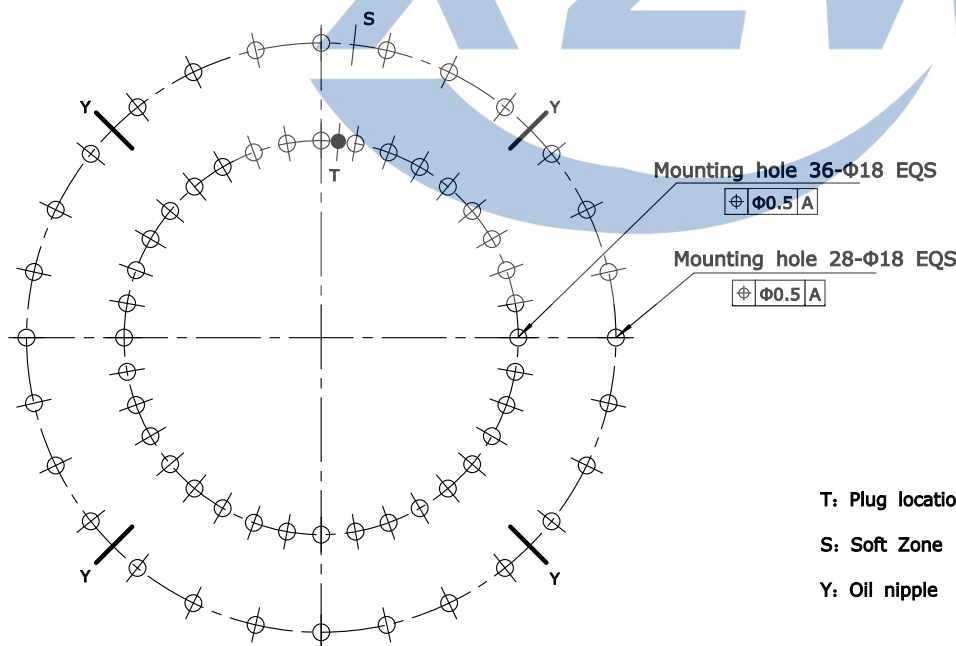



- U.O.N  $\nabla$  6.3
- Notes:
1. Unspecified chamfer: 1.0x45°  
Through hole chamfer: 1.0x45°  
Edges chamfer
  2. Raceway of inner & outer ring induction hardened. hardness: 55~62HRC  
Depth: ≥3.0mm
  3. Inner & outer ring quenched & tempered, hardness: 207~262HB
  4. Radial clearance: 0.15~0.40 mm  
Axial clearance: 0.15~0.40 mm

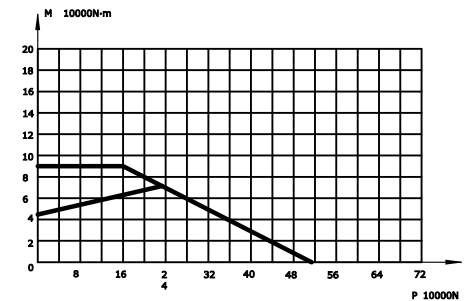

T: Plug location  
S: Soft Zone  
Y: Oil nipple

08	HG/T2811	Seals	NBRI-3	W17	2	
07	GB117-76	Pin	CN45	Φ5×45	1	
06		Plug	CN45	Φ25	1	
05	JB/T7940.7	Oil nipple	Component	M8×1	4	
04	GB/T699	Inner ring	50Mn		1	
03	GB/T308-2002	Ball	GCr15	19.844	109±1	
02	HG/T2349	Spacer	Nylon	D20	109±1	
01	GB/T699	Outer ring	50Mn		1	
No.	Standard	Component	Material	Model	Qty	Remark
			Model	WD-230.20.0844	Drawing	Weight 47.1kg
			Name	Slewing Bearing	Qty	Scale
			Material	50Mn	Total 1 page	the 1st page
Design	Standard					
Check						
Process	Approve					
Date						
XUZHOU WANDA SLEWING BEARING CO.,LTD						
						
Tel: +86 516 83309366 Fax: +86 516 83915766 <a href="http://www.slew-bearing.com">http://www.slew-bearing.com</a>						