
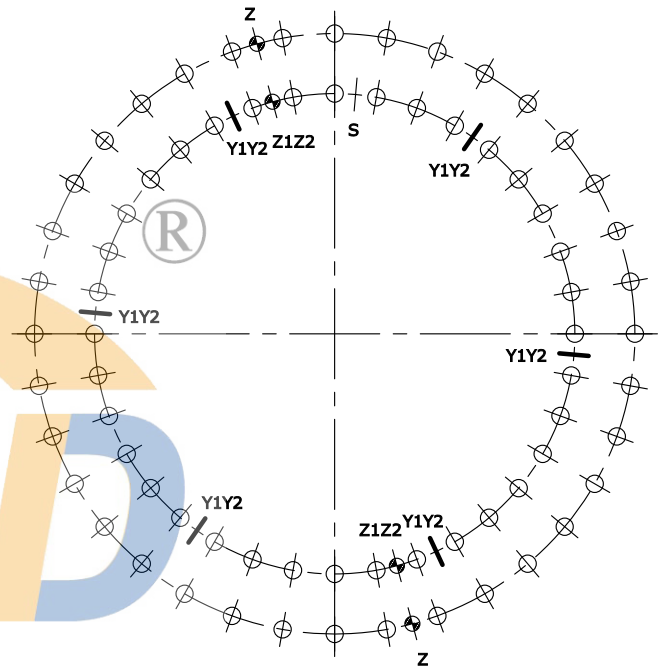



U.O.N  $\nabla$  6.3

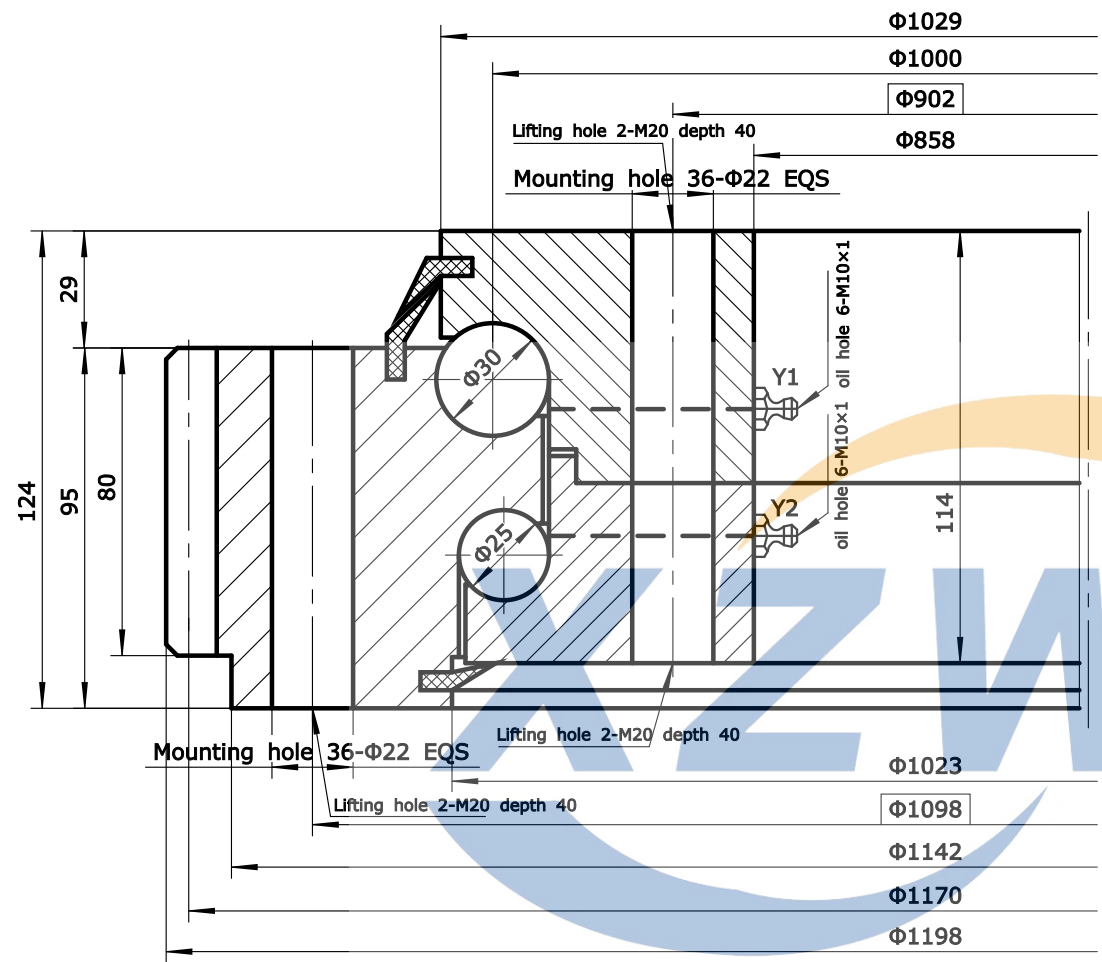

Notes:  
 1. Raceway of inner & outer ring induction hardened. hardness: 55~62HRC  
 Depth ≥ 3.5mm  
 2. Inner & outer ring quenched & tempered, hardness: 207~262HB

Gear Data				Design		Check		Model				Weight	
Module	m	10	Gear heat treatment requirements		Date	Approve		021.30.1000				300kg	
Teeth no	z	117	HRC		Qty	Size	Axial clearance	0.10~0.30				Scale	
Teeth pressure angle	$\alpha$	20°	Precision(GB10095-88)	10	Inner ring mounting hole	36	Φ22	Radial clearance	0.20~0.90				Scale
Modification coefficients	x	+0.5			Outer ring mounting hole	36	Φ22	machine tolerances without notes				Scale	
Reduction coefficients	km	1.0			Oil hole	2x6	M10x1	≤200	≤500	≤710	≤1120	Total 1 page	
Pitch diameter	d	1170						±0.30	±0.40	±0.50	±0.65	The 1st page	
								≤1600	≤2000	≤2500	≤3150	<b>XUZHOU WANDA SLEWING BEARING CO.,LTD</b>  Fax: +86 516 83309366 Fax: +86 516 83915766 <a href="http://www.slew-bearing.com">http://www.slew-bearing.com</a>	
								±0.80	±0.95	±1.10	±1.35		
								≤4000	≤5000				
								±1.65	±2.0				
								Technical processing standards without notes according to ...JB/T2300-2011					